




ORNET



Fiber Optic Simplex & Duplex Cord ONFR (riser rated), OFNP (plenum rated) or LSZH rated

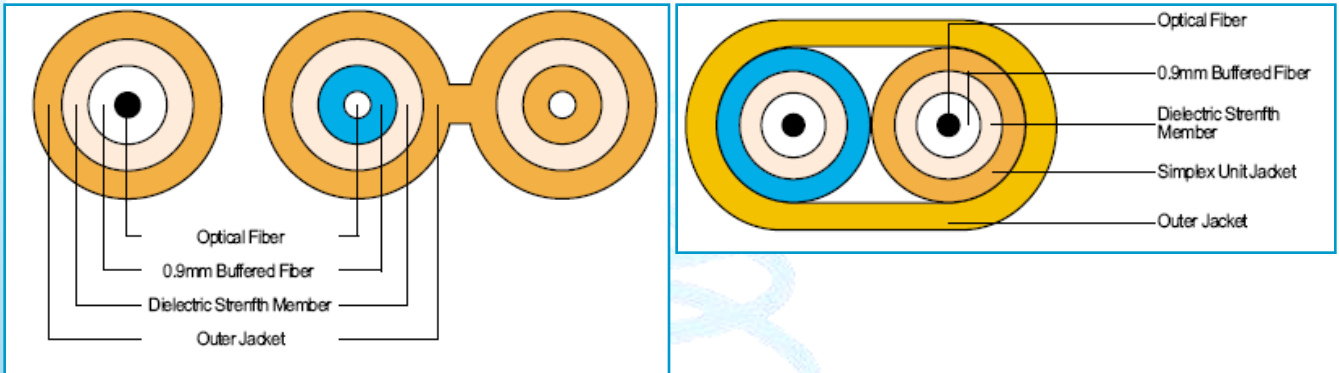

Description/Applications:

- Short Run Office & Computer Room Cabling
- Patch cords, Pigtails and Jumpers
- Equipment Interconnects
- OFNR(riser rated), OFNP(plenum rated) or LSZH(low smoke zero halogen rated)
- RoHS (Restriction of the use of Certain Hazardous Substances Directive) complied

Construction:

- Simplex - Buffer color : Natural (white)
- Zipcord - Buffer color : Blue and Orange
- Duplex Flat : - Buffer color : Natural (white) - Simplex unit color : Blue and Orange
- Fiber - Single mode, 50 μ m, 62.5 μ m multi mode available
- Jacket color
 - Single Mode : Yellow
 - 62.5/125 μ m 1Gbe : Orange
 - 50/125 μ m 1Gbe : Orange
 - 50/125 μ m 10Gbe : Aqua

Specification:

- ISO/IEC 11801
- Telcordia GR-409-CORE
- ANSI/ ICEA S-83-596



ORNET



Mechanical Characteristics:

Storage Temperature : -40 to + 70°C / Operating Temperature : -10 to + 70°C

SIMPLEX CORD	Buffered Fiber Outer diameter [μm]	Nominal Diameter		Nominal Weight		Maximum Tensile Load		Crush Load		Minimum Bend Radius				
		[mm]	[inch]	[kg/km]	[lb/kt]	Short Term [N]	Long Term [N]	Short Term [N/cm]	Long Term [N/cm]	Loaded [mm]	Installed [inch]			
SIMPLEX CORD	Riser/Pleum rate 1.6mm	600±50μm	1.6	0.06	3.0	0.01	130	65	3.5	1.5	32	1.26	16	0.64
	Riser/Pleum rate 1.8mm	600±50μm	1.8	0.07	4.0	0.01	130	65	3.5	1.5	36	1.42	18	0.72
	Riser/Pleum rate 2.0mm	900±50μm	2.0	0.08	4.0	0.01	130	65	3.5	1.5	40	1.57	20	0.80
	Riser/Pleum rate 2.4mm	900±50μm	2.4	0.09	6.5	0.01	300	150	3.5	1.5	48	1.089	24	0.95
	Riser/Pleum rate 2.9mm	900±50μm	2.9	0.11	9.5	0.02	300	150	3.5	1.5	58	2.28	29	1.15
ZIPCORD	Riser/Pleum rate 1.6mm	600±50μm	1.6	0.06	5.5	0.01	200	100	3.5	1.5	32	1.26	16	0.64
	Riser/Pleum rate 1.8mm	600±50μm	1.8	0.07	7.0	0.02	200	100	3.5	1.5	36	1.42	18	0.72
	Riser/Pleum rate 2.0mm	900±50μm	2.0	0.08	8.0	0.02	200	100	3.5	1.5	40	1.57	20	0.80
	Riser/Pleum rate 2.4mm	900±50μm	2.4	0.09	12.0	0.03	500	250	3.5	1.5	48	1.89	24	0.95
	Riser/Pleum rate 2.9mm	900±50μm	2.9	0.11	17.0	0.04	500	250	3.5	1.5	58	2.28	29	1.15
DUPLEX FLAT	Riser/Pleum rate 2.0mm	900±50μm	2.0	0.08	18.0	0.04	260	130	3.5	1.5	40	1.57	20	0.80
	Riser/Pleum rate 2.8mm	900±50μm	2.8	0.11	28.0	0.06	500	250	3.5	1.5	56	2.20	28	1.11

Transmission Characteristics:

	9/125μm (1310/1550nm)	50/125μm Standard (850/1300nm)	50/125μm Gigabit (850/1300nm)	50/125μm 10Gigabit (850/1300nm)	62.5/125μm Standard (850/1300nm)	52.5/125μm Gigabit (850/1300nm)
Attenuation(dB/km) Typical values	0.5/0.4	3.0/1.0	3.0/1.0	3.0/1.0	3.5/1.0	3.5/1.0
Minimum Bandwidth (MHz • km)	-	500/500	500/500	1500/500	200/500	200/500
Ethernet Link Distance (m)	10Gbps	-	-	300	-	-
	1Gbps	-	-	550/550	-	250/550