




Multi Fiber Connector

Features and Benefits:

- Compliant with IEC 61754-7
- Optical performance 100% factory tested
- Available variant cable length
- Fiber count available : 4, 8, 12
- Precision plastic ferrule with endface geometry per IEC proposal

Application:

- Telecommunication networks
- Active/passive device termination
- Local area network
- Access network

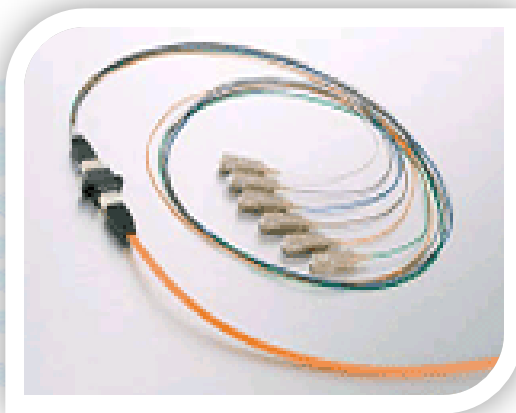

Specification:

Characteristics	Conditions	Values
Insertion Loss	Standard	< 0.75dB
	Low	< 0.35dB
Return Loss	Flat PC	< 55dB
Temperature Cycling	40 ~ +75°C, 40cycles	< 0.2dB
Humidity Condensation	-20 ~ 65°C, 95%, 336Hrs	< 0.2dB
Vibration	10-55Hz, 1.5mm p to p, 2Hrs	< 0.3dB
Durability	1000 mating cycles, clean every 25	< 0.2dB