



Optical Connectors

Features and Benefits:


- High Connectivity
- High precision
- Low insertion loss
- Low back reflection
- Easy to handle
- Environmentally stable

Application:

- CATV, System
- Fiber Optic Telecommunication
- Optical Network Equipment
- High Speed Transmission System
- Testing instruments
- Bi-directional Systems EDF

Specification:

Characteristics	Conditions	Values
Insertion Loss		<0.3dB
Durability	500Matings	<0.2dB
Temperature Cycling	-40~+80°C (42Cycles)	<0.2dB
Humidity Cycling	75°C, 95%/336hr	<0.2dB
Vibration	10~55Hz(2hr)	<0.2dB
Impact	1.5m drop, 8times	<0.2dB

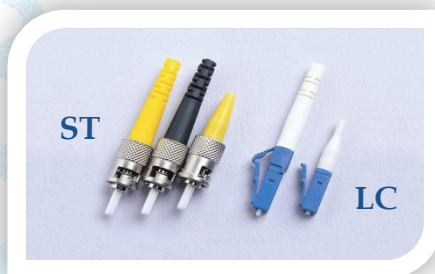



ORNET



Ordering Information:

