



Optical Switch

Features and Benefits:

- Typical insertion loss 0.7dB
- Several configuration available
- High repeatability over broad range of environmental condition
- Return loss less than -55dB \ Small size

Application:

- Optical single routing, fiber network configuration, restoration and by-pass
- Sensor switching, source/ detection selection, reference, and multi-source measurements in instrumentation
- Fiber optic component testing
- Research and development



Specification:



Characteristic	Unit	Values
Insertion Loss(Max)	dB	1.0
Return Loss(Min)	dB	-55
Polarization dependent Loss (Max)	dB	0.1
Repeatability	dB	±0.02
Cross-talk	dB	-60
Switching time	ms	10
Operating temp	°	-20 to 70
Storage temp	°	-40 to 85



ORNET



Ordering Information:

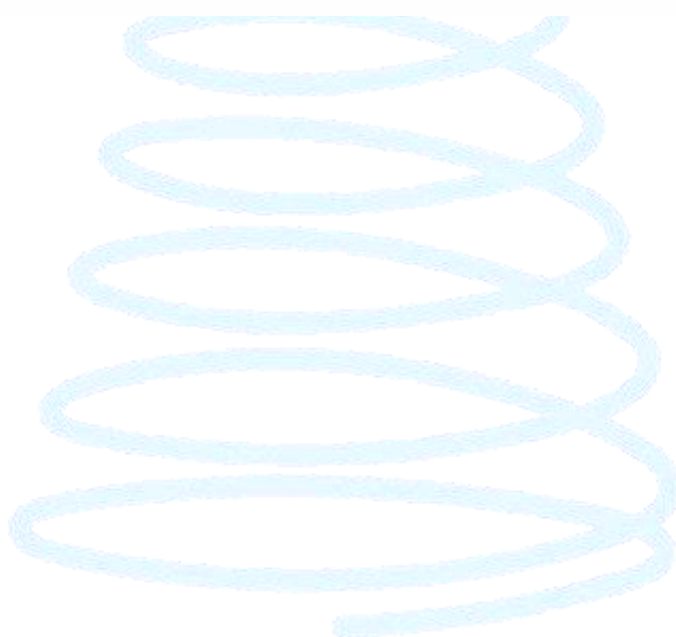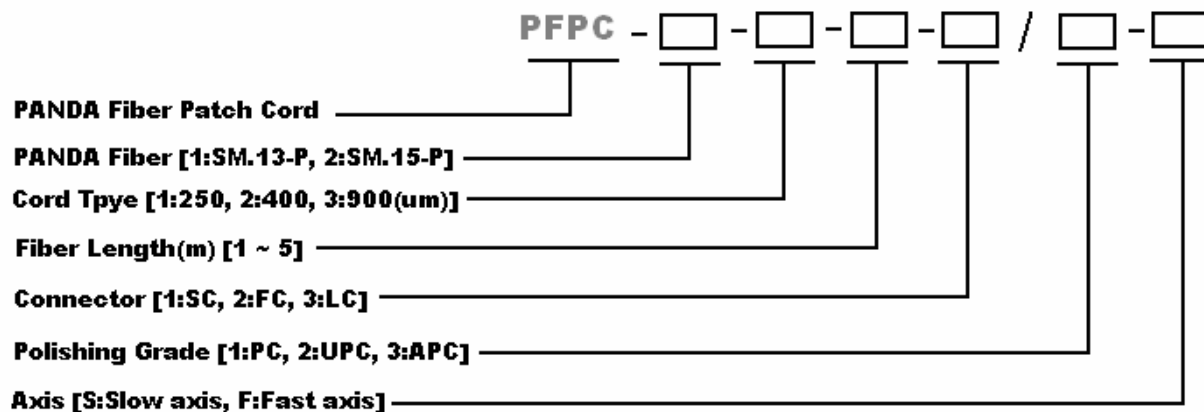

ORNET Sdn. Bhd.

47-4, Jalan SP 2/1, Taman Serdang Perdana, Seksyen 2, 43300 Seri Kembangan, Selangor, MALAYSIA.

Email : info@ornets.com

Tel : +603 - 89412300

Website : www.ornets.com

Fax : +603 - 89415300